

TENAX

Protective rim guard for cylinders



Beauty

Difficult grab with the burglary tools thanks to the sloping shape.

Anti-drill resistance

High strength due to the hardened one-piece stainless steel body, AISI 420 and 55 HRC hardness.

No corrosion

Anti-scratch finish and resistance against corrosion over 1000 hours in salt fog test (SS DIN 50021; 5% salt; 35°C).

Versions

Round and Oval; satin chromium plated and gilded PVD finishes; 5 sizes for 10÷18 mm thickness.

NB. Tenax can be used with all the AGB SCUDO cylinders.




Round
(38 mm distance between)



Oval
(21 mm distance between screw holes centers)

Choose the thickness "X" according to the cylinder protrusion "S":

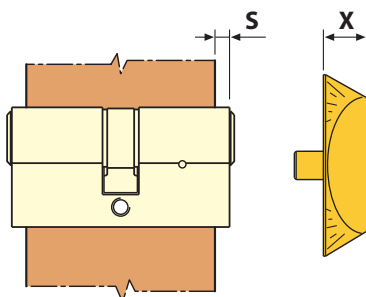

GR	X mm	S mm
1	10	0÷4
2	12	0÷6
3	14	2÷8
4	16	4÷10
5	18	6÷12

TENAX - Protective rim guard for cylinders



For higher security use TENAX together with:

SCUDO DCK
Security cylinder with PIN code



SICURTOP POSEIDON
Security Multipoint Locks

TENAX Range

VERSIONS	TENAX	ESCUTCHEON	PLATE with RUBBER RING	PLATE	SCREWS	FINISH
 ROUND art. C94850XX35	●	●	●		●	PVD
 ROUND art. C94600XX35	●			●	●	PVD
 ROUND art. C94850XX32	●	●	●		●	OCS
 ROUND art. C94600XX32	●			●	●	OCS
 OVAL art. C94700XX35	●			●	●	PVD
 OVAL art. C94700XX32	●			●	●	OCS

NB. In the codes quoted above the XX variable means the possible sizes (01-02-03-04-05).