
# **TOUR** SYSTEMS FOR CIRCULAR AND RECTANGULAR PIVOT WINDOWS AGB Open, Close, Live

#### How I do envy...

A porthole window and the sophisticated choice of those who love precious and exclusive things, of those who wish to assert their own personality in a clear and definite way.





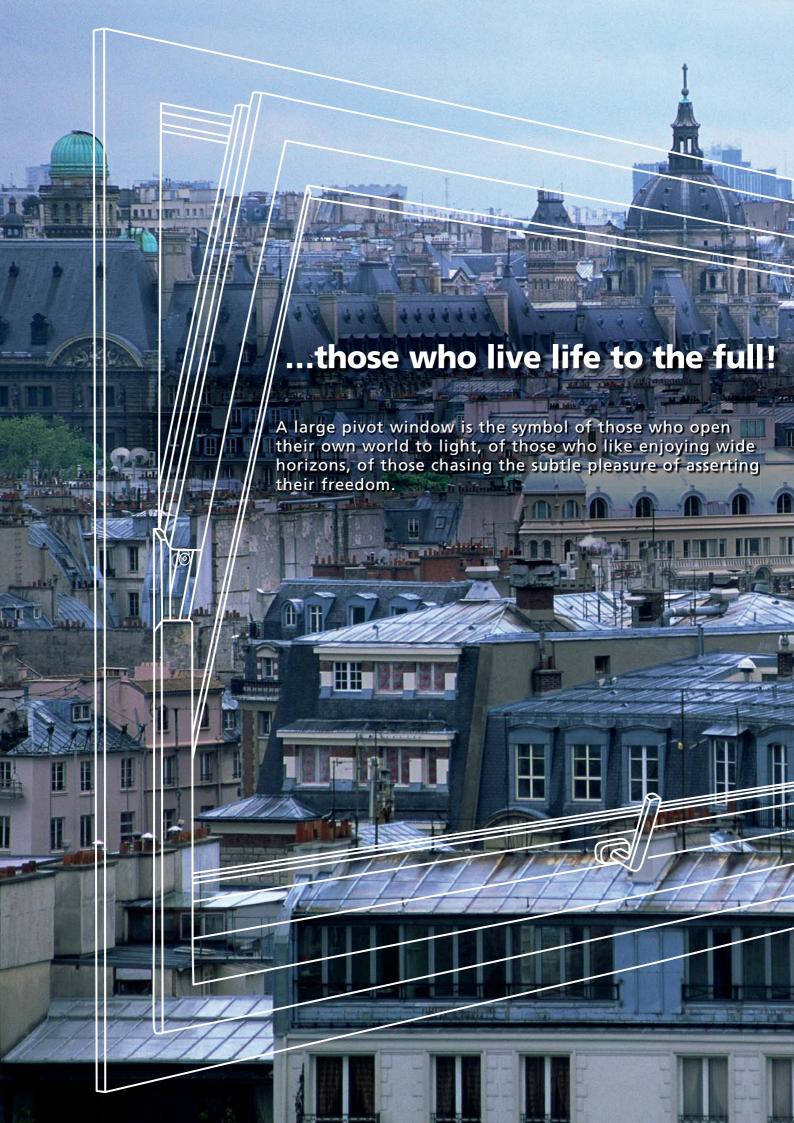

## **Tour** System for circular and rectangular pivot windows

The challenge AGB wanted to address by designing Tour was industrializing a system which is fascinating but technically demanding and making it more functional and easy to manage. Nowadays Tour is the most advanced system for pivot windows. The innovative design choices applied to Tour make it unique for quality and convenience.

## Circular pivot windows AGB





## The first gap 12 system






Hinge blocking




The hinge friction is easy to reach and adjust thanks to the Allen wrench.


#### Independent and friction hinges

The hinges are equipped with friction and independent from the movement transmission, therefore they do not require any milling on the sash nor or the frame. Moreover, a rapid coupling system makes it possible to assemble and disassemble the movable sash without removing the hinge.

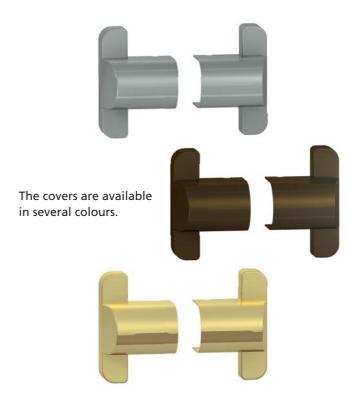

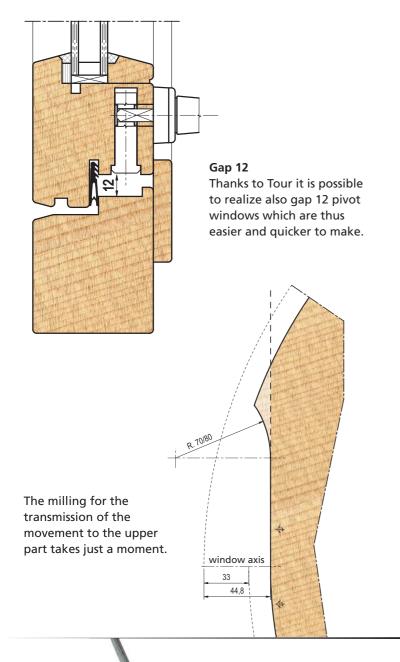



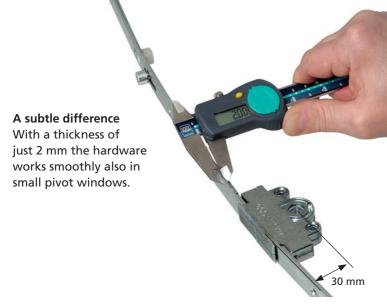

**Easy cleaning**The window turns of 180° to make the outside glass easy to clean.

### Rectangular pivot windows



#### A universal system

The system is designed for gap 4 windows but it has compensating shims in case of windows with increased gap dimensions.

A wide range of strikers make it compatible with all construction systems, both traditional and with continuous gasket.



	TOUR-30 layout 1 lath 30, axis 15		TOUR-30 layout 2 lath 30, axis 15		TOUR-35 layout 3 lath 35, axis 17,5		TOUR-35 layout 4 lath 35, axis 20		TOUR-40 layout 5 lath 40, axis 20	
	30-35		35 55		35 35 17.5		42 22 22		45 20 20	
	Surface < 2 m <sup>2</sup>	Surface > 2 m <sup>2</sup>	Surface < 2 m <sup>2</sup>	Surface > 2 m <sup>2</sup>	Surface < 2 m <sup>2</sup>	Surface > 2 m <sup>2</sup>	Surface < 2 m²	Surface > 2 m <sup>2</sup>	Surface < 2 m <sup>2</sup>	Surface > 2 m²
Upper strikers	×3	x 4	x 3	×4	×3	×4	* ×3	x 4	x 3	<b>8</b> × 4
Lower	×3	x 4	×3	×4	x 3	x 4	× 3	× 4	×3	x 4
Limiting devices strikers	x 1	<b>₽ x</b> 1	¥1	<b>1</b>	<b>₽ ×</b> 1	<b>1 1 1 1 1 1 1 1 1 1</b>	<b>₽ x</b> 1	<b>₽ x</b> 1	x1	<b>₽ • • •</b> • • • • • • • • • • • • •
		x1		x1		x1		* x 1		×1



Adjustment of the friction on the hinge

The hinge friction and the opening limiting device are easy to reach and adjust.

#### **Friction hinges**

Three models of friction hinges are available:

- with 30 mm rebate, 200 kg loading capacity
- with 35 mm rebate, 200 kg loading capacity
- with 40 mm rebate, 300 kg loading capacity.









More effective microventilation
The closing strikers leave complete freedom when choosing the handle and ensure a wider opening for really effective microventilation.



Easy cleaning
By unlocking the limiting
striker with the wrench
provided, the window
rotates of 180° making
the outside glass easier

to clean.





Alban Giacomo SpA

Via A. De Gasperi, 75 36060 Romano d'Ezzelino (VI) Italy Tel. +39 0424 832 832 www.agb.it - info@agb.it