



Adjustable hinges for flush doors

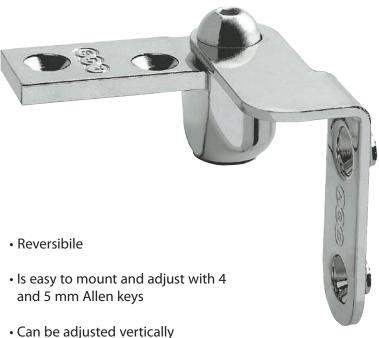

- Can be regulated horizontally by means of an octagonal camwasher



The 2R adjustable hinge has been designed especially for mass produced interior flush doors.

Combined with the Mediana and XT locks with central spring latch, the 2R hinge allows both the panels and the frames to be reversed, which makes it possible to install non handed doors with 180° opening capability.

This allows manufacturers to standardise the production of panels and frames, while installers will be able to change the opening direction of the door directly on the job simply by rotating the lock and inverting the hinges as indicated in the diagram.



Top fastening screw.

Support bracket with holes for 5 mm diameter screws.

Octagonal cam washer made of extremely durable nylon is used to adjust the pressure on the seals.

Brass hinge pin for vertical adjustment.

Die-cast hinge body with offset fastening holes for 5 mm diameter screws.



Pin fastening dowel.



Snap fastening hinge cap.



Finishings:

Enamelled brass plated, Nickel plated, Matt chromium plated, Matt black.

Door panels:

- The hinge is designed for standard panels of 45 mm thickness.
 Hinges for 41 to 44 mm panels are available on request.
- Door weight up to 40 kg.

