

# domio



**AGB**  
HOSPITALITY

## O.IN

### indoor card reader.

It can be standalone or operated by a control module, depending on security requirements. The minimalist design and customization of the cover make it suitable for sockets and switches of any style.



83. Black



71. White




21. Silver

## O.SAVER

### energy saver pocket.

Similar to O.IN in design, it accommodates the card to activate a room's electricity. It can manage partial activation for service personnel.

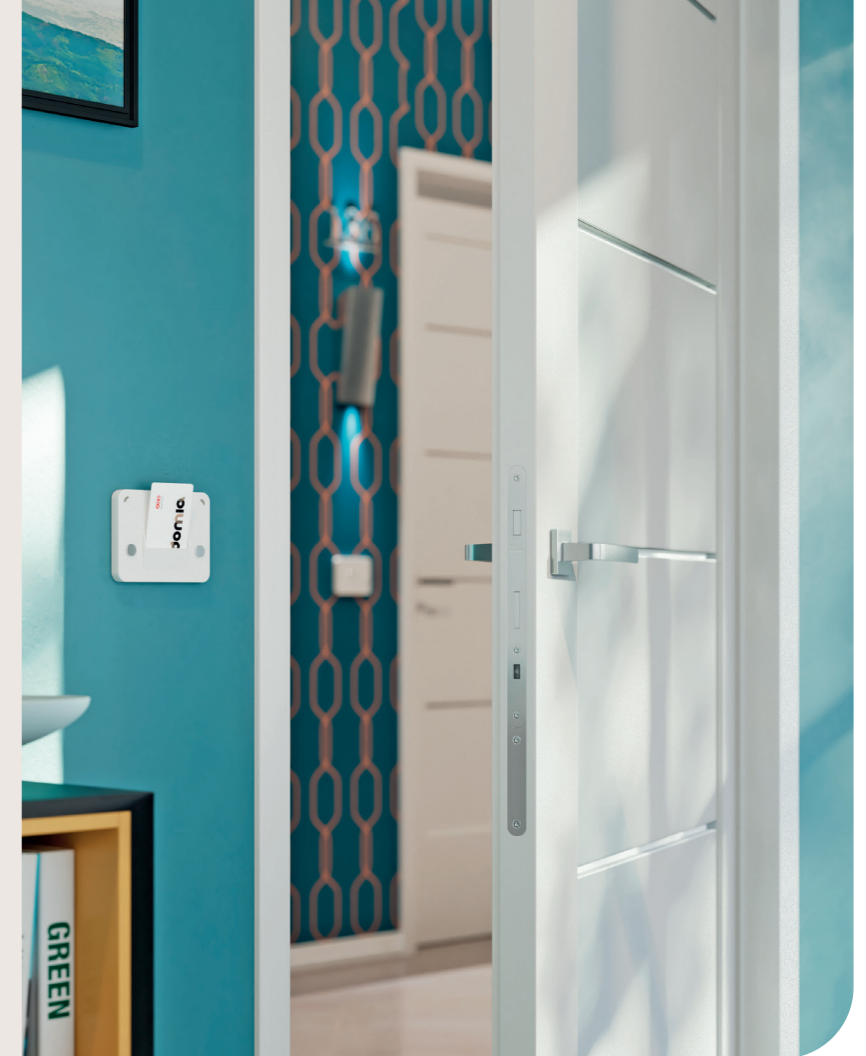

83. Black




71. White



21. Silver

## Technical data


### CORRIDOR SIDE DEVICE

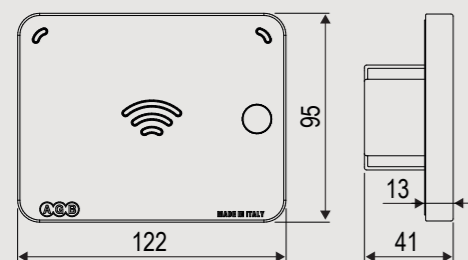

#### Technical features

- Wall-mounted access control system with Wi-Fi Bluetooth.
- Wi-Fi connectivity reduces installation costs.
- System compatible with the Domia platform.
- Dimensions: 122 x 95 x 13 mm.
- Indoor installation on 502-503 round box.
- Adjustable timer.
- 2 output relays.
- Optional 'doorbell' button.
- Power supply: 12 V DC

### ROOM SIDE DEVICE

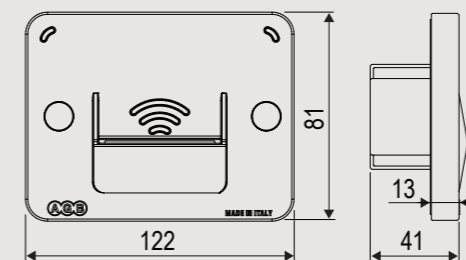

#### Technical features

- Wall-mounted access control system with Wi-Fi Bluetooth.
- Wi-Fi connectivity reduces installation costs.
- System compatible with the Domia platform.
- Dimensions: 122 x 81 x 13 mm.
- Indoor installation on 502-503 round box.
- Adjustable timer.
- 2 output relays.
- Optional "Do Not Disturb" and "Make-up Room" buttons.
- Power supply: 12 V DC

**O.ES**

## outdoor card reader.

Maximum protection. It is operated by a control module via encrypted communication. Installation is flush with the wall without a junction box. Designed to withstand the weather, it can withstand violent impacts with just replacing the cover.



Z90040.03.29 - 07.25 - Communications Dept. - Printed in Italy




71. White



21. Silver

## Technical data

### OUTDOOR DEVICE

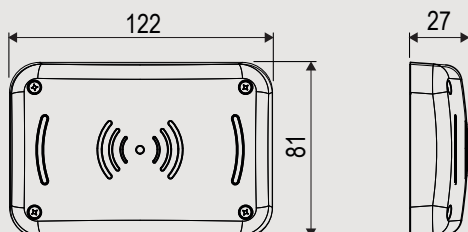

### Technical features

- Wall-mounted access control system with Wi-Fi Bluetooth.
- Wi-Fi connectivity reduces installation costs.
- System compatible with the Domia platform.
- Dimensions: 122 x 81 x 27 mm.
- Indoor and outdoor installation on 502-503 box.
- Adjustable timer.
- Operates with separate control module.
- Power supply: 12 V DC.