i.MOTION S

SILENT MOVEMENT

MADE IN ITALY






AUTOMATION SYSTEM FOR LIFT&SLIDE i.Motion-S is born from the life of the surface of the life of the life of the surface of the life of the life

i.Motion-S is born from the best Italian know-how of industrial automation.

The installation is simple and the system is highly efficient onwards. Thanks to the power of its motor, i.Motion-S is the perfect solution to move sashes with great dimensions.

i.MOTION^S







 Comfortable and silent when working.





- Up to 440 kg for any carriage set.
- Up to 800 kg with double hardware.
- Dragging force up to 300N.





- Compatible with smart home.
- Compatible with access control systems.



SIMPLICITY MAKES THE DIFFERENCE

- Just one partner for the hardware system and the automation.
- i.Motion-S is compatible with all AGB Lift&Slide systems.



LOW ENERGY MODE (EN 16005)

- It can move sashes up to 300 kg automatically, without additional radars.
- The low energy mode can be disabled through a dedicated switch.



PLUG AND PLAY SYSTEM

- Self education during the first use.
- Self education in case of black-out.
- Manual opening with handle if necessary.



JUST A POWER CABLE!

- It doesn't require an electrician know-how.
- As a joinery, you can handle the work by yourself.



HOLD-TO-RUN DEVICE

- It doesn't require security devices.
- It doesn't require the intervention of a qualified technician.
- It can be implemented with an automatic system, remote command and security sensors.



MINIMAL DESIGN


- The lifting motor can be installed in sashes with a minimal 60 mm visible profile.
- With a suitable installation, the dragging motor disappears over the frame.


PLUG AND PLAY: 3, 2, 1...GO!

AGB offers a complete kit for motorised Lift&Slide, composed by 3 components with plug and play system. Logistical and installation simplicity are guaranteed: a great starting point! 1 Completely XC pins Housing of XC hooks invisible lock motorised transom lock 50 9 90


THE SYSTEM

Few components and a simple interface with two selectors ensure the rapidity of installation and first use adjustments.

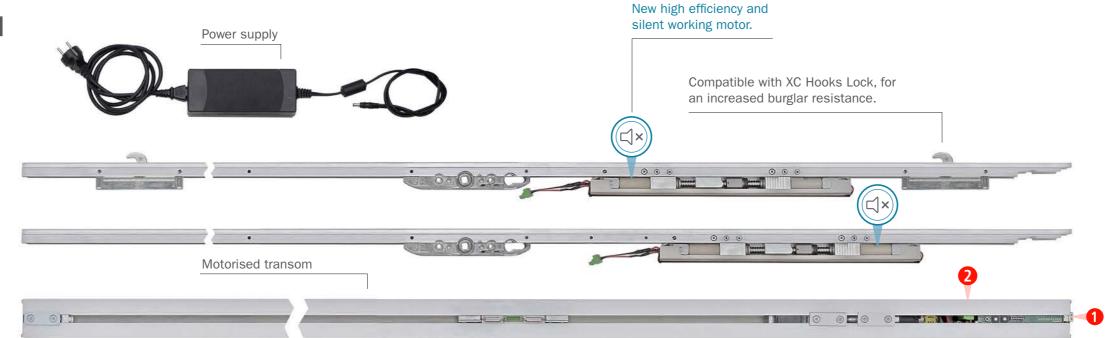

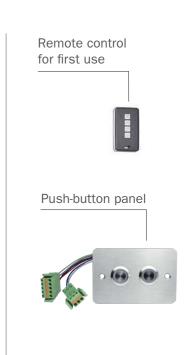



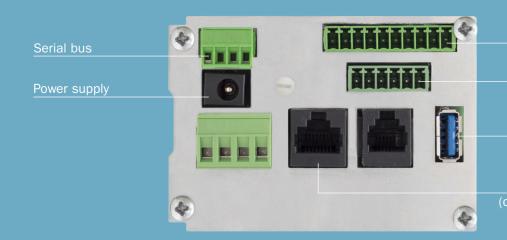


Configurable inputs

Configurable outputs

USB connector

Configuration keypad connector (optional, to be used by a qualified technician) 2 INTERFACE OF COMMAND

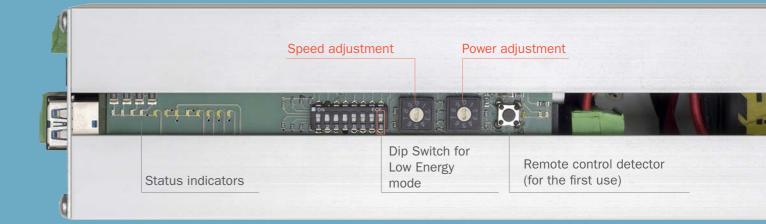

TYPES OF OPENING

STANDARD OPENINGS

i.Motion-S allows to manage the most common types of opening using a standard system.

The installation of the motor can be managed by the joinery itself.




Layout A

- 1 sliding sash.
- 1 fixed sash.




Layout D

- 1 central fixed sash.
- 2 lateral sliding sashes inward.



Layout C

- 1 central sliding sash.
- 2 lateral fixed sashes.



Layout E

- 2 central coaxial sashes inward.
- 2 lateral fixed sashes.

NON-STANDARD OPENINGS


It is possible to motorise even the non-standard openings.

In this case, AGB offers the support of a qualified partner.



Layout G

• 2 consecutive sliding sashes in the same way of opening.



Corner layout

• 2 convergent sliding sashes.

TECHNICAL INFORMATION

ı	Application	For systems: Lift&Slide
	AGB systems	Basic, Intermediate, Climatech, Imago, Wood-Aluminium
RŢ.	Material of profiles	Wood - PVC - Aluminium - Steel - Mixed
501:	Power supply	100 - 240 V, 50/60 Hz, 20 A
-\	Signals	12 indicators of status
	Software	The programme allows to personalize the system
CE	CE mark of the motor	EN 14846 / EN 16005
	Lift&Slide Cascading	It is the same of the ITT provided with the Cascading
F	Absorbed power	120 W
	Dimensions of sliding motor	90x60 mm
	Dimensions of lifting motor	22x50x420 mm
	Maximum speed during rotation	0,25 mt/sec - ADJUSTABLE
2	Power of pull	Up to 300 N - the most powerful in the market - ADJUSTABLE
<u></u>	Lifting time	About 8 seconds
kg	Maximum of lifting weight	Up to 440 kg for any carriage set Up to 800 kg with double hardware
	Interface with domotics	Integrated
\$	USB port	Integrated
ار×	Silence	Comfort of use

i.MOTION^S

The automation system i.Motion-S keeps the minimal design that distinguishes all the AGB Lift&Slide systems.

Well-detailed design, great automation care and quality of the system make i.Motion-S the most suitable solution for the advanced projects.

100% made in Italy





Alban Giacomo spa

Via A. De Gasperi 75, 36060 Romano d'Ezzelino (VI) Italy +39 0424 832 832 www.agb.it - info@agb.it

