

|--|



① 10% frame 90% glass


250 - 400 kg



EVOLVED LIFT AND SLIDE. THINNER FRAME WITH 50 MM PROFILE, ULTRA ESSENTIAL. EVEN MORE GLASS TO BRING MORE LIGHT IN. ONE SYSTEM, MORE DESIGN, MORE SOLUTIONS.

> IMAGO<sup>++</sup> is a system 100% made in Italy. AGB experience and quality guarantee excellent performance while sliding, comfort, thermal insulation and security.







## THE REAR HANDLE FOR A CLEAN, THIN PROFILE

The main innovation of this system is the position of the handle that is moved on the back of the central node. This simple but major change allows to further taper the frame removing the handle from the front jamb to deliver a clean profile.

Aiming to large openings, this system allows to increase in the number of sliding sashes to manage greater opening surfaces, thanks to an easy overlapping.

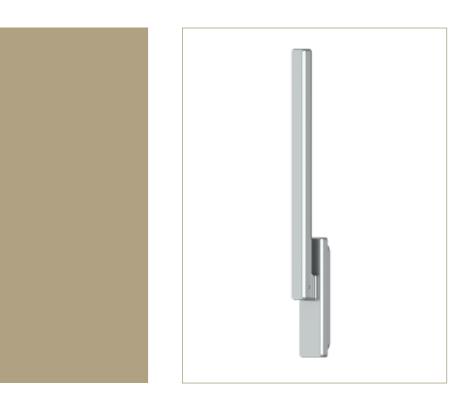

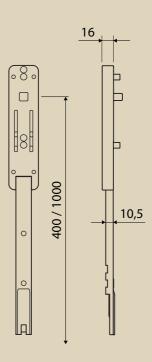


## **LEANER REAR LOCK**

Pursuing the idea of minimal profiles, the lock case is placed in the rear side of the moving sash, perpendicular to the glass surface, reducing the size of jambs.

The lock guarantees the same actuation torque of the traditional lock.





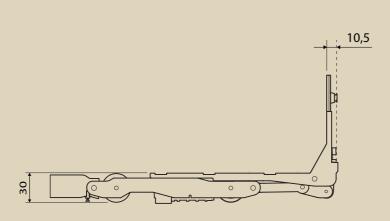


### **REAR CARRIAGE**

Thanks to some small but major changes, the new IMAGO++ carriage allows the transmission of opening and closing motion from lock to moving rod.

The carriages transmit the movement of the lock to a front closure that allows to secure the sash on the frame.

The introduction of this concept doesn't affect the loading capacity and the minimal size.

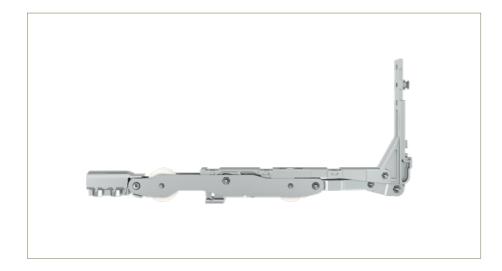



### LIFTING DEVICE

This lifting accessory aims to be the solution that allows to lift heavy sashes keeping low the forces to move the handle. In particular, this device is able to subtract the equivalent of 150 kg of vertical thrust from the door and consequently the rotation of the handle during lifting is reduced.

In addition, a second advantage is slowing down the return of the handle when closing, preventing sudden and rapid returns.





# **3 SIDES** HARDWARE CONFIGURATION FOR FRAME CLOSURE SASHES



Configuration for primary sashes that allows closing on frame pins to ensure performance and safety according to market needs.

# **2 SIDES** HARDWARE CONFIGURATION FOR SECONDARY SASHES




Configuration for secondary sashes which allows to create infinite sliding openings with complete overlap of the sashes.





## MULTISLIDE LIFT AND SLIDE

**IMAGO++** Multislide allows to move several doors simultaneously and to create infinite openings thanks to the rear handle positioned on the rear side of the central node.

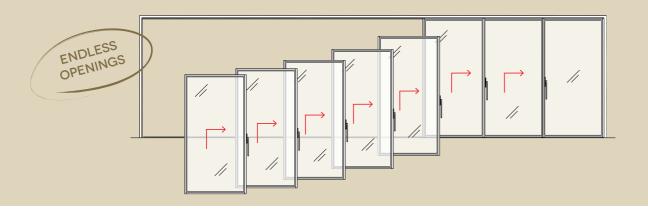




## **REAR HANDLE**

The rear handle, positioned on the rear side of the central node does not protrude when sliding allowing perfect and complete overlapping of the sashes.

Moreover, in this way, the front jaml can be embedded into the frame.


#### SASHES OVERLAPPING






For the same wall hole size, it allows the opening of larger areas compared to traditional systems.

## **OPENING SEQUENCE**







- Rotate in sequence the handles 1, 2, 3.
- Move the first sash.
- Move following the sequence all other sashes.

First sash with IMAGO++ system

First sash with IMAGO+ system and standard handle

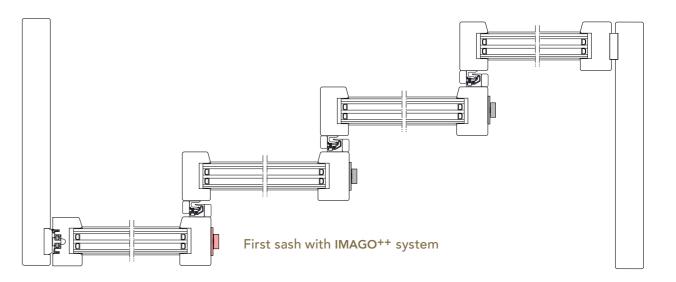



First sash with IMAGO+ system and standard handle





Open, Close, Live

## Alban Giacomo SpA

Via A. De Gasperi 75, 36060 Romano d'Ezzelino (VI) Italy +39 0424 832 832 www.agb.it - info@agb.it

