

PASCAL

retract slide system



AGB

Open, Close, Live


PASCAL

Configurations

ARTech

**Artech hardware
in the sash**

- Wind load resistance: C5 (3000 pa)
- Water tightness: Class A9



**Secure microventilation
(handle position at 90°)**



**Anti-burglary
protection**

- Air permeability: Class 4
- Corrosion resistance: Class 5 (480 h)




layout A*



layout C*



layout E





layout D

* left-hand sash example.



PASCAL 200 KG

Sash rebate width	540 - 2000 mm
Sash rebate height	540 - 2700 mm
Displacement in sliding position	8 mm
Maximum sash weight	200 kg
Height adjustment	+ 3 mm

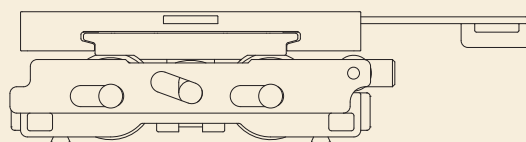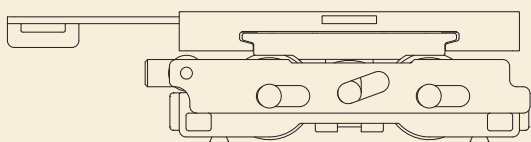

PASCAL 250 KG


Sash rebate width	540 - 2000 mm
Sash rebate height	540 - 2700 mm
Displacement in sliding position	8 mm
Maximum sash weight	250 kg
Height adjustment	+ 3 mm

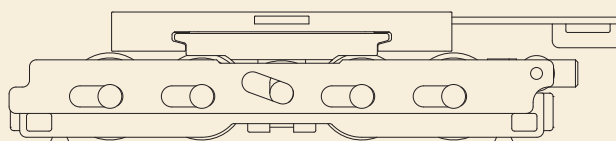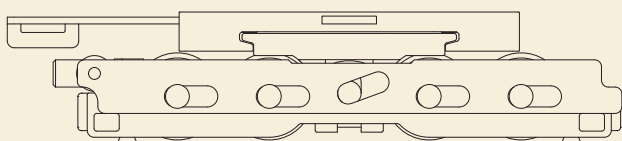


Compatible PVC systems:
Aluplast Smart Slide, Aluplast Smart Slide Neo, Gealan Smoovio, Rehau Synego Slide,
Salamander evolutionDrive Plus+, Vekamove76

PASCAL


Accessories

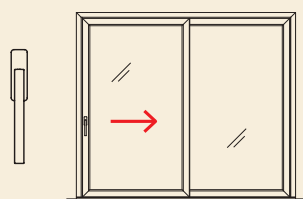

closed position


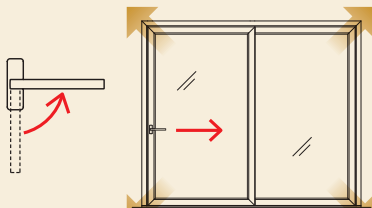


microventilation position

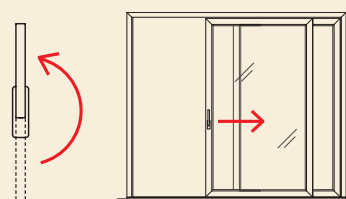


sliding position

SOFT CLOSE

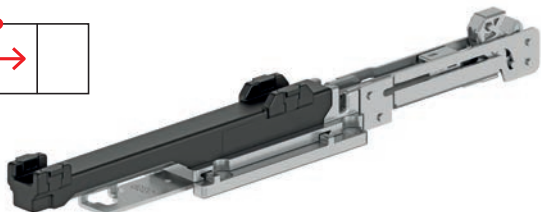


UPPER SLIDERS



CARRIAGES 200 KG





CARRIAGES 250 KG



CAM STRIKER



LOCKING POINT ON CENTRAL JAMB

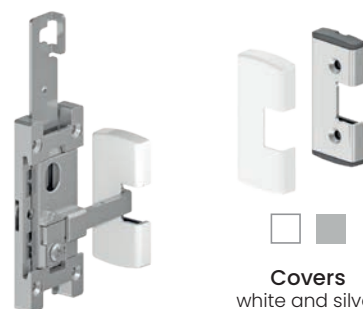



Open, Close, Live

Alban Giacomo SpA
Via A. De Gasperi, 75
36060 Romano d'Ezzelino (VI) Italia
+39 0424 832 832
www.agb.it - info@agb.it

MADE IN ITALY