

R4

H I N G E F O R W O O D E N E N T R A N C E D O O R S



MADE IN ITALY

High capacity
Adjustable friction
Wide adjustments
Easy to be installed
Minimal design

AGB

Open, Close, Live

160 KG CAPACITY, SASH OPENING ALWAYS PRECISE


R4 is the solution for the modern architecture requests: up to 160 kg capacity with three hinges. The sash movement is always precise and fluid, thanks to the stability offered by R4.



Capacity



Precision



Stability


PURE ITALIAN DESIGN

The fastening screws and the adjustment grubs are hidden by the covers.

The cover edge is present on sash and frame parts to hide the working defects.

SUITABLE RANGE FOR THE MOST COMMON AVAILABLE PROFILES


R4 Mod. 10

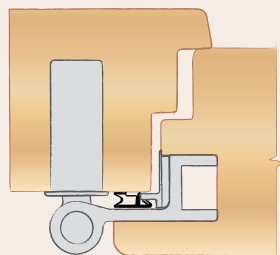

For profiles with gasket
on rebate, 10/12 mm

Compatible with:

- gap 4/12 mm
- rebate 18/20 mm
- axis 9/13 mm

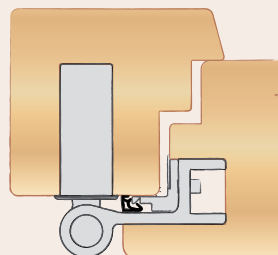

For profiles with
reduced gasket

Compatible with:

- gap 4/12 mm
- rebate 15/18/20 mm
- axis 9/13 mm



RAPID INSTALLATION

R4 allows a high rapid installation of the hinges bodies and the workings fulfillment, both using the CNC machines and the jig.

WIDE ADJUSTMENTS

R4 reduces the problems during installation thanks to the extra-large adjustments! The hinge is easily adjustable keeping the door closed.

- Lateral adjustment: ± 3 mm
- Permanent block of the lateral adjustment
- Gasket compression adjustment: $0 \div 6$ mm
- Vertical adjustment: $+3$ mm, -2 mm

ANTI-BURGLAR GRUBS



The two anti-burglar grubs avoid the extraction of the installed hinge pins, in hinges installations with external mountings.

EASY TO BE INSTALLED

The fastening with two pins simplifies the installation of heavy sashes.

ADJUSTABLE FRICTION


Thanks to the adjustable friction, the sash movement could be controlled step by step with the maximum security.

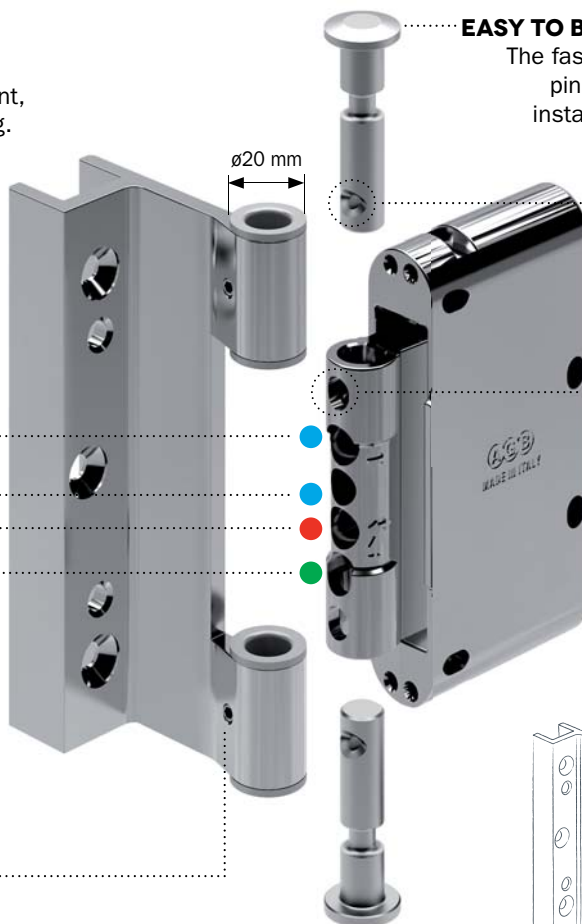

Anti-burglar
Class 3




R4 Mod. 18

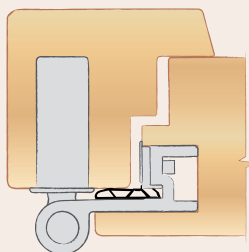

For profiles with gasket on rebate, 15/18 mm

- Compatible with:
- gap 4/12 mm
 - rebate 15/18 mm
 - axis 9/13 mm

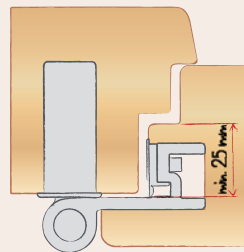

For profiles without gasket on rebate

- Compatible with:
- gap 4/12 mm
 - rebate 15/18 mm
 - axis 9 (25 mm min.), 13 mm



Alban Giacomo spa

Headquarters:

Via A. De Gasperi, 75
36060 Romano d'Ezzelino (VI) - Italy

Warehouse:

Via Col Beretta, 4
36022 Cassola (VI) - Italy

Cylinders plant:

Via S. Bortolo, 44
36020 Pove del Grappa (VI) - Italy

Tel. +39 0424 832 832

www.agb.it - info@agb.it

MADE IN ITALY